

Honeywell


LIGHT BULBS SERIES

LED PANEL SERIES

SPOTLIGHTS

EXTENSION CORDS

SURGE PROTECTORS

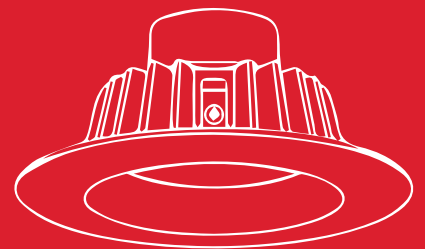

For more information, please visit www.HoneywellLights-fans.com

Honeywell



Iluminaciones Técnicas Authorized Licensee is a free zone establishment formed in mid-1992 set up to manufacture and distribute high-end decorative and commercial lighting, ceiling fans, LED lightbulbs and solar products. Focused as a regional distribution center, it offers a logistics platform integrated by world-class ports, railroad, highway and airport. It maintains the best connection to Central America, the Caribbean and the Andean Pact, ideal for establishing and boosting import and re-export business to the region. This zone located in Colon city, Panama offers a wide range of services such as: import, export, storage, sales, marketing, distribution and value-added logistics services, storage, packaging, packing, labeling, classification, exhibition, among others.

 **ilumitec**[®]
INTERNATIONAL



Honeywell

LED LIGHT BULB SERIES

Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

LED LIGHTBULB A19



SPECIFICATIONS

Shape:	A60
Cap/Fitting:	E27
Voltage:	100-240V
Beam Angle:	180° Degree

DIMENSION

DIMENSION	SHAPE
6W Size: D-55mm H-98mm	A55
9W Size: D-60mm H-108mm	A60
15W Size: D-70mm H-126mm	A70

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
6W	3000K	540 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-3K	4 Units
6W	6500K	560 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-65K	4 Units
9W	3000K	750 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-02-4PK-9W-3K	4 Units
9W	6500K	800 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-02-4PK-9W-65K	4 Units
9W	6500K	800 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-02-1PK-9W-65K	1 Unit
15W	3000K	1150 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-3K	2 Units
15W	6500K	1300 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-65K	2 Units

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	A60
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	107mm
Width:	60mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1000 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-27K
8W	6500K	1055 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-65K

LIGHTBULB GU10/2-PIN TWIST AND LOCK



SPECIFICATIONS	
Shape:	MR16
Cap/Fitting:	GU10
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.
DIMENSION	
Height:	54 mm
Width:	50 mm
ADDITIONAL INFORMATION	
Equivalent:	50W Halogen GU10

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
5W	3000K	410 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-3K	2 Units
5W	4000K	470 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-4K	2 Units
5W	6500K	470 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-65K	2 Units
7W	3000K	640 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-3K	2 Units
7W	4000K	650 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-4K	2 Units
7W	6500K	650 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-65K	2 Units
5W	3000K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM3K	2 Units
5W	4000K	450 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM4K	2 Units
5W	6500K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM65K	2 Units
7W	3000K	640 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM3K	2 Units
7W	4000K	650 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM4K	2 Units
7W	6500K	650 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM65K	2 Units



LED LIGHTBULB MR16/2-PIN



SPECIFICATIONS

Shape:	MR16
Cap/Fitting:	GU5.3
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

DIMENSION

Height:	48 mm
Width:	50 mm

ADDITIONAL INFORMATION

Equivalent:	50W Halogen MR16
-------------	------------------

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
5W	3000K	400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-3K	2 Units
5W	4000K	430 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-4K	2 Units
5W	6500K	430 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-65K	2 Units
5W	3000K	420 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM3K	2 Units
5W	4000K	420 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM4K	2 Units
5W	6500K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM65K	2 Units



LED FILAMENT LIGHT BULB



SPECIFICATIONS	
Shape:	CANDLE
Cap/Fitting:	E14
Bulb Finish:	Transparent

ADDITIONAL INFORMATION	
Height:	118mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
5W	2700K	600 lm	100-130V - 50-60Hz	Dimmable	HW-BE14-01-2PK-5W-DIM27K	2 Units

LED FILAMENT LIGHT BULB



SPECIFICATIONS	
Shape:	CANDLE
Cap/Fitting:	E12
Bulb Finish:	Transparent

ADDITIONAL INFORMATION	
Height:	117mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
2W	2700K	250 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BE12-01-2PK-2W-27K	2 Units
5W	2700K	580 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM27K	2 Units
5W	6500K	600 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM65K	2 Units

LED FILAMENT LIGHT BULB



SPECIFICATIONS	
Shape:	CANDLE
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION	
Height:	113mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
5W	2700K	580 lm	100-130V - 50-60Hz	Dimmable	HW-BLED-03-2PK-5W-DIM27K	2 Units



HIGH POWER LIGHT BULB



SPECIFICATIONS	
Shape:	LED BULB T140
Cap/Fitting:	E27
Bulb Finish:	White

ADDITIONAL INFORMATION	
Height:	220 mm
Width:	140 mm
Beam Angle:	180°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
50W	6500K	4700lm	100-240V - 50-60Hz	Non Dimmable	HW-BLED-01-50W-65K	

HIGH POWER LIGHT BULB



SPECIFICATIONS	
Shape:	LED BULB T150
Cap/Fitting:	E27

ADDITIONAL INFORMATION	
Height:	270mm
Width:	150mm
Beam Angle:	180°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
100W	6500K	9000 lm	100-277V - 50-60Hz	Non Dimmable	HW-BLED-02-100W-65K	

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	173mm
Width:	125mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1055 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-06-8W-DIM27K

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Amber

ADDITIONAL INFORMATION

Height:	173mm
Width:	125mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	880 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-07-8W-DIM27K

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Transparent

DIMENSIONS

Height:	138mm
Width:	64mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
4W	2700K	450 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-04-4W-DIM27K

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Amber

DIMENSIONS

Height:	138mm
Width:	64mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	800 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-05-8W-DIM27K

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	G45
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	77 mm
Width:	45 mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
5W	2700K	580 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM27K	2 Units
5W	6500K	600 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM65K	2 Units

LED FILAMENT LIGHT BULB



SPECIFICATIONS

Shape:	G45
Cap/Fitting:	E27
Bulb Finish:	Frosted

DIMENSIONS

Height:	80 mm
Width:	45 mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6W	3000K	500 Lm	100-265V - 50-60Hz	No Dimmable	HW-BG45-02-1PK-6W-3K
6W	4000K	500 Lm	100-265V - 50-60Hz	No Dimmable	HW-BG45-02-1PK-6W-4K
6W	6500K	500 Lm	100-265V - 50-60Hz	No Dimmable	HW-BG45-02-1PK-6W-65K

LED MINI-BULB G4



SPECIFICATIONS

Cap/Fitting: G4

Beam Angle: 220° Degree

DIMENSIONS

Height: 38mm

Width: 10mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
2W	3000K	200 Lm	12V - 50-60Hz	Non Dimmable	HW-BG4-01-3PK-1.8W-3K	3 Units

LED MINI-BULB G9



SPECIFICATIONS

Cap/Fitting: G9

Beam Angle: 220° Degree

DIMENSIONS

Height: 48.5mm

Width: 16mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
2.5W	3000K	210 lm	100-130V - 50-60Hz	Non Dimmable	HW-BG9-01-3PK-2.5W-3K	3 Units

LED MINI-BULB G9



SPECIFICATIONS

Cap/Fitting:	G9
Beam Angle:	220° Degree

DIMENSIONS

Height:	54mm
Width:	18mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Package
4W	3000K	440 lm	100-130V - 50-60Hz	Dimmable	HW-BG9-02-3PK-4W-DIM3K	3 Units

LED LIGHT BULB



SPECIFICATIONS

Shape:	PAR20
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS

Height:	87mm
Width:	63mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000k	500 lm	100-240V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-3K
5W	6500k	520 lm	100-240V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-65K

LED LIGHT BULB



SPECIFICATIONS	
Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS	
Height:	87mm
Width:	92mm

AVAILABLE WATTAGE OPTIONS					
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
9W	3000K	900 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-3K
9W	4000K	950 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-4K
9W	6500K	950 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-65K

LED LIGHT BULB



SPECIFICATIONS	
Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS	
Height:	95mm
Width:	128mm

AVAILABLE WATTAGE OPTIONS					
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
30W	3000K	3000lm	100-277V/50-60Hz	Dimmable	HW-BP30-02-30W-3K

LED LIGHT BULB



SPECIFICATIONS	
Shape:	PAR38
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS	
Height:	135mm
Width:	116mm

AVAILABLE WATTAGE OPTIONS					
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
12W	3000K	1150 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP38-01-12W-3K
12W	6500K	1200 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP38-01-12W-65K

LED LIGHTBULB T8



SPECIFICATIONS	
Shape:	LED TUBE
Cap/Fitting:	T8

ADDITIONAL INFORMATION	
Volt:	100-277V - 50-60Hz
Material:	Glass

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Base	Size	Dimmable / Non Dimmable	Model
9W	3000K	940Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-3K
9W	4000K	940 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-4K
9W	6500K	900 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-65K
18W	3000K	1930 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-3K
18W	4000K	1930 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-4K
18W	6500K	1930 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-65K
36W	6500K	3760 Lm	FA8	W-25.5mm H-2380mm - 2.4m	Non Dimmable	HW-BT8-03-36W-65K



Honeywell

LED PANEL SERIES

Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

LED PANEL 1X4



(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	LED BACKLIT
Cap/Fitting:	1x4
Finish:	Aluminium Frame, PS Diffuser

ADDITIONAL INFORMATION

Volt:	100-277V / 50-60Hz
Beam Angle:	120° Degree
Dimmable / Non Dimmable:	Non Dimmable


AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Model
40W	3000K/4000K/6500K	3500Lm /4000Lm /3700Lm	1200mm x 300mm x 30mm	HW-P1X4-01-40W-CCT

LED PANEL 2X2



(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	LED BACKLIT
Cap/Fitting:	2x2
Finish:	Aluminium Frame, PS Diffuser

ADDITIONAL INFORMATION

Volt:	100-277V / 50-60Hz
Beam Angle:	120° Degree
Dimmable / Non Dimmable:	Non Dimmable


AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Model
40W	3000K/4000K/6500K	3900Lm /4300Lm /4000Lm	600mm x 600mm x 30mm	HW-P2X2-01-40W-CCT

LED PANEL 2X4



(CCT) Color Temperature Switch



SPECIFICATIONS	
Shape:	LED BACKLIT
Cap/Fitting:	2X4
Finish:	Aluminium Frame, PS Diffuser

ADDITIONAL INFORMATION	
Shape:	LED BACKLIT
Cap/Fitting:	2X4
Finish:	Aluminium Frame, PS Diffuser

AVAILABLE WATTAGE OPTIONS				
Power	Tone	Brightness	Size	Model
60W	3000K/4000K/6500K	5600Lm/6300Lm/5700Lm	1200mm x 600mm x 30mm	HW-P2X4-01-60W-CCT

Installation Option



HW-P2X2-HANGIN-KIT



LED RECESSED PANEL



SPECIFICATIONS

Shape:	Round LED Lamp
Cap/Fitting :	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	160Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-3K
3W	6500K	160Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-65K
6W	3000K	360Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-3K
6W	6500K	360Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-65K
12W	3000K	850Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-3K
12W	6500K	850Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-65K
18W	3000K	1380Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-3K
18W	6500K	1380Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-65K
24W	6500K	2090Lm	D-292mm H-18mm	Non Dimmable	HW-P01-R24W-65K

LED RECESSED PANEL



SPECIFICATIONS

Shape:	Square LED Lamp
Cap/Fitting	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle	110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K	360Lm	120mm x 120mm x 18mm	Non Dimmable	HW-P02-S6W-3K
6W	6500K	360Lm	120mm x 120mm x 18mm	Non Dimmable	HW-P02-S6W-65K
18W	3000K	1090Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P02-S18W-3K
18W	6500K	1090Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P02-S18W-65K

LED SURFACE MOUNTED PANEL



SPECIFICATIONS	
Shape:	Round LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION	
Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	6500K	390 Lm	D-112mm H-28mm	Non Dimmable	HW-P03-R6W-65K	
12W	6500K	840 Lm	D-160mm H-27mm	Non Dimmable	HW-P03-R12W-65K	
18W	6500K	1430Lm	D-210mm H-27mm	Non Dimmable	HW-P03-R18W-65K	
24W	6500K	2030 Lm	D-282mm H-28mm	Non Dimmable	HW-P03-R24W-65K	

LED SURFACE MOUNTED PANEL



SPECIFICATIONS	
Shape:	Square LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION	
Volt	100-240V / 50-60Hz
Beam Angle	110°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
18W	3000K	1090Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-3K	
18W	6500K	1290Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-65K	
24W	3000K	1900Lm	282mm x 282mm x 282mm	Non Dimmable	HW-P04-S24W-3K	
24W	6500K	1900Lm	282mm x 282mm x 282mm	Non Dimmable	HW-P04-S24W-65K	

LED RECESSED PANEL




SPECIFICATIONS	
Shape:	Round LED Lamp
Cap/Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION	
Volt:	100-240V / 50-60Hz
Beam Angle :	110 °

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	3000K/4000K/6500K	1100Lm / 1200Lm / 1100Lm	D-220mm H-18mm	Non Dimmable	HW-P05-R6W-CCT	
12W	3000K/4000K/6500K	1440Lm / 1600Lm / 1440Lm	D-292mm H-18mm	Non Dimmable	HW-P05-R12W-CCT	
18W	3000K/4000K/6500K	1170Lm / 1380Lm / 1180Lm	D-220mm H-18mm	Non Dimmable	HW-P05-R18W-CCT	
24W	3000K/4000K/6500K	1680Lm / 1840Lm / 1680Lm	D-292mm H-18mm	Non Dimmable	HW-P05-R24W-CCT	

LED RECESSED PANEL

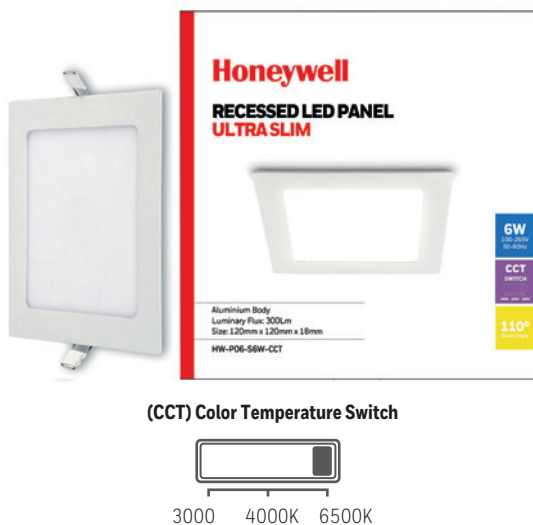

SPECIFICATIONS	
Shape:	Square LED Lamp
Cap/Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION	
Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
18W	3000K/ 4000K/ 6500K	1260Lm/ 1380Lm/ 1270Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P06-S18W-CCT	
24W	3000K/ 4000K/ 6500K	1680Lm/ 1900Lm / 1680	290mmx 290mmx 18mm	Non Dimmable	HW-P06-S24W-CCT	

LED SURFACE MOUNTED PANEL



(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	Round LED Lamp
Cap/Fitting :	Surface Mounted Ceiling
Finish:	White, Black

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle :	110°


AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	330Lm /440Lm /330Lm	D-112mm H-28mm	Non Dimmable	HW-P07-R6W-CCT
12W	3000K/4000K/6500K	780Lm /880Lm /780Lm	D-160mm H-28mm	Non Dimmable	HW-P07-R12W-CCT
18W	3000K/4000K/6500K	1260Lm /1380Lm /1260Lm	D-210mm H-28mm	Non Dimmable	HW-P07-R18W-CCT
24W	3000K/4000K/6500K	1680Lm /1840Lm /1690Lm	D-282mm H-28mm	Non Dimmable	HW-P07-R24W-CCT

LED SURFACE MOUNTED PANEL



(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	Square LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White, Black

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	320Lm /400Lm /320Lm	112mm x 112mm x 28mm	Non Dimmable	HW-P08-S6W-CCT
12W	3000K/4000K/6500K	780Lm /860Lm /780Lm	160mm x 160mm x 28mm	Non Dimmable	HW-P08-S12W-CCT
18W	3000K/4000K/6500K	1260Lm /1380Lm /1260Lm	210mm x 210mm x 28mm	Non Dimmable	HW-P08-S18W-CCT
24W	3000K/4000K/6500K	1680Lm /1840Lm /1680Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P08-S24W-CCT

LED SURFACE MOUNTED PANEL



SPECIFICATIONS	
Shape:	Round LED Lamp with Motion Sensor
Cap/Fitting :	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION	
Volt:	100-277V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
18 W	3000K/4000K/6500K	1440Lm/1440Lm/1415Lm	D-210mm H-37mm	Non Dimmable	HW-P09-SM-R18W-CCT	

LED RECESSED SPOTLIGHT



SPECIFICATIONS	
Shape:	Round LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION	
Height:	45mm
Width:	90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	390 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-3K	
5W	6500K	420 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-65K	
5W	3000K	390 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-3K	
5W	6500K	420 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-65K	

LED RECESSED SPOTLIGHT



SPECIFICATIONS	
Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION	
Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	390 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-3K	
5W	6500K	420 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-65K	
5W	3000K	390 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-3K	
5W	6500K	420 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-65K	


LED RECESSED SPOTLIGHT



SPECIFICATIONS	
Shape:	Round LED Lamp
Fitting:	Tilttable Angle
Finish:	White

ADDITIONAL INFORMATION	
Height:	43mm
Width:	85mm
Beam Angle:	45° Degree

(CCT) Color Temperature Switch



AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
7W	3000K/4000K/6500K	610Lm / 700Lm / 650Lm	100-240V / 50-60Hz	Non Dimmable	HW-D05-7W-WH-CCT	



Honeywell

EXTENSION CORDS AND SURGE PROTECTORS SERIES

Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

INDOOR AND OUTDOOR HEAVY DUTY EXTENSION CORD

Indoor/ Outdoor



AVAILABLE OPTIONS:

- HW-E-01-25FT
- HW-E-01-50FT
- HW-E-01-100FT

ENERGY INFORMATION

100FT

Max Power:	1625W	1250W
Voltage/Hz:	125V/50-60HZ	

ADDITIONAL INFORMATION

No. of Outlet Plug:	1
Finish:	Orange
Specification:	16 GAUGE / 3-pronged
Certificate:	UL
Components:	Copper
Size:	25 / 50 / 100 ft

3 OUTLET WALL SURGE PROTECTOR EXTENDER WITH 2 USB PORT

Indoor



AVAILABLE OPTIONS:

- HW-E-02

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V/60HZ
Current:	15A
Surge Protect:	300J

ADDITIONAL INFORMATION

No. of Outlet Plug:	3-outlet
Finish:	White
Specification:	2USB DC5V/2.4A total
Certification:	UL
Components:	Copper, Plastic

6 OUTLET WALL EXTENDER

Indoor



AVAILABLE OPTIONS:

HW-E-04

ENERGY INFORMATION

Max Power: 1875W
Voltage/Hz: 125V/60HZ
Current: 15A

ADDITIONAL INFORMATION

No. of Outlet Plug: 6-outlet
Finish: White
Certification: ETL
Components: Copper,Plastic

6 OUTLET SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF

Indoor



AVAILABLE OPTIONS:

HW-E-05

ENERGY INFORMATION

Max Power: 1875W
Voltage/Hz: 125V/60HZ
Current: 15A
Surge Protect: 350J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6
Finish: White
Specification: 14AWG*3C/SJT/3FT
Certification: ETL
Components: Plastic

POWER STRIP WITH LIGHTED SWITCH ON/OFF

Indoor



6 OUTLET	3' FEET	14 GAUGE	
--------------------	-------------------	--------------------	--

AVAILABLE OPTIONS:	
HW-E-06	

ENERGY INFORMATION	
Max Power:	1875W
Voltage/Hz:	125V/60HZ
Current:	15A
Surge Protect:	90J

ADDITIONAL INFORMATION	
No. of Outlet Plug:	6
Finish:	Black + Yellow
Specification:	14AWG*3C/SJT/3FT
Certification:	ETL
Components:	Iron, Plastic

3 OUTLET EXTENDER POWER STRIP AND SURGE PROTECTOR

Indoor



3 OUTLET	450 JOULES	3' FEET		
--------------------	----------------------	-------------------	--	--

AVAILABLE OPTIONS:	
HW-E-07	

ENERGY INFORMATION	
Max Power:	1625W
Voltage/Hz:	125V
Current:	13A
Surge Protect:	450J

ADDITIONAL INFORMATION	
No. of Outlet Plug:	3-outlet
Finish:	White
Specification:	16AWG*3C/SPT-2
Certification:	ETL
Size:	3' ft

3 OUTLET SURGE PROTECTOR POWER STRIP

Indoor



AVAILABLE OPTIONS:

HW-E-08

ENERGY INFORMATION

Max Power:	1625W
Voltage/Hz:	125V
Current:	13A
Surge Protect:	450J

ADDITIONAL INFORMATION

No. of Outlet Plug:	3-outlet, 2 USB total 2.4A
Finish:	White
Specification:	16AWG*3C/ SPT-2
Certification:	ETL
Size:	3' ft

4 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF

Indoor



AVAILABLE OPTIONS:

HW-E-09

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V
Current:	15A
Surge Protect:	90J

ADDITIONAL INFORMATION

No. of Outlet Plug:	4-outlet
Finish:	White
Specification:	14AWG*3C/SJT/3FT
Certification:	ETL
Components:	Copper, Plastic

POWER STRIP WITH LIGHTED SWITCH ON/OFF

Indoor



AVAILABLE OPTIONS:

HW-E-10

ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

Surge Protect: 1050J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6-outlet, 2 USB DC5V/2.4A total

Finish: White

Specification: 14AWG*3C/SJT/3FT

Certification: UL

Components: Copper, Plastic

HEAVY DUTY SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF

Indoor



AVAILABLE OPTIONS:

HW-E-11

ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V

Current: 15A

Surge Protect: 350J

ADDITIONAL INFORMATION

No. of Outlet Plug: 8-outlet

Finish: White

Specification: 14AWG*3C/SJT/3FT

Certification: ETL

Components: Copper, Plastic

Honeywell | Extension & Power Strip

6 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF

2-Pack
Indoor



AVAILABLE OPTIONS:

HW-E-12 Duo Pack

ENERGY INFORMATION

Max Power: 1875W
Voltage/Hz: 125V
Current: 15A
Surge Protect: 90J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6-outlet
Finish: White
Specification: 14AWG*3C/SJT
Certification: UL
Size: 3' ft



VOLTAGE PROTECTOR



120
VOLT

140
JOULES

AVAILABLE OPTIONS:

HW-SP-01

PERFORMANCE PARAMETER

Surge Protect: 140J

ENERGY INFORMATION

Voltage: 120V

Frequency: 50/60Hz

Current: 15A

Delay time: 30s

Under voltage: 90V

Over Voltage: 140V

VOLTAGE PROTECTOR



HW-SP-02



AVAILABLE OPTIONS:

HW-SP-02 ETL Certification

PERFORMANCE PARAMETER

Surge Protect: 140J

ENERGY INFORMATION SP-02

Voltage: 120V

Frequency: 60Hz

Current: 10A

Delay time: 180s

Under voltage: 90V

Over Voltage: 140V

VOLTAGE PROTECTOR



HW-SP-03

AVAILABLE OPTIONS:

HW-SP-03

PERFORMANCE PARAMETER

Surge Protect: 140J

ENERGY INFORMATION SP-03

Voltage: 120V

Frequency: 50/60Hz

Current: 15A

Delay time: 180s

Under voltage: 90V

Over Voltage: 140V

VOLTAGE PROTECTOR



AVAILABLE OPTIONS:

HW-SP-04

PERFORMANCE PARAMETER

Color: Transparent

ENERGY INFORMATION SP-04

Voltage: 220V

Frequency: 50/60Hz

Current: 20A

Delay time: 180s

Under voltage: 170V-197V

Over Voltage: 265V

VOLTAGE PROTECTOR



AVAILABLE OPTIONS:	
HW-SP-05	ETL Certification

PERFORMANCE PARAMETER	
Color:	Transparent

ENERGY INFORMATION	SP-05
Voltage:	120V
Frequency:	50/60Hz
Current:	20A
Delay time:	180s
Under voltage:	90V-105V
Over Voltage:	140V

VOLTAGE PROTECTOR



AVAILABLE OPTIONS:	
HW-SP-06	

PERFORMANCE PARAMETER	
Color:	White

ENERGY INFORMATION	SP-06
Voltage:	120V
Frequency:	50/60Hz
Current:	20A
Delay time:	180s
Under voltage:	90V-105V
Over Voltage:	140V

VOLTAGE PROTECTOR



AVAILABLE OPTIONS:

HW-SP-07

PERFORMANCE PARAMETER

Color: White

ENERGY INFORMATION SP-07

Voltage: 220V
 Frequency: 50/60Hz
 Current: 20A
 Delay time: 180s
 Under voltage: 170V-197V
 Over Voltage: 265V

VOLTAGE PROTECTOR



120

VOLT

350

JULES

AVAILABLE OPTIONS:

HW-SP-08

PERFORMANCE PARAMETER

Color: White

ENERGY INFORMATION

Voltage: 120V
 Frequency: 50/60Hz
 Current: 15 A
 Under voltage: 90V
 Over Voltage: 140V